


## BUILDERS KLEEN

### Product

- ✓ Fast acting and safe to use
- ✓ No foul odours!
- ✓ A powerful descaler
- ✓ Removes rust and iron deposits
- ✓ Excellent for brick cleaning and the removal of excess grout and mortar
- ✓ Organic salt composition

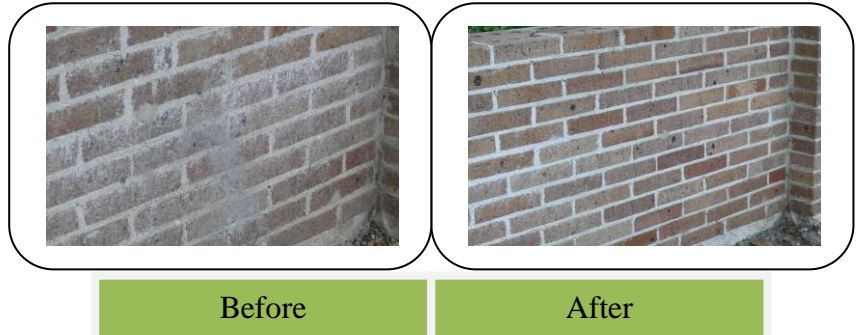

BUILDERS KLEEN provides a safe and environmentally friendly solution to clean brick walls. It is an organic salt and is non-fuming. However in the presence of reactive deposits such as calcium carbonate and calcium sulphate BUILDERS KLEEN behaves just like hydrochloric acid, rapidly dissolving scale and calcium deposits. It's fast acting and easy to use. See below for further application details.

### Technical

Physical state	Liquid
Colour	Clear to pale yellow
Odour	Characteristic
pH (5% solution)	< 1
Specific gravity	1.21
Shelf life	1 year

Product Code	Outer Pack	APN
CHCR-15001 (1L)	6	9324828003519
CHCR-15005 (5L)	3	9324828003526
CHCR-15015 (15L)	1	9324828003533

### Application

#### **LIME, SCALE & RUST REMOVER**

1. Dilute 1 part BUILDERS KLEEN with 3 parts water (250 ml per litre of water).
2. Pour, Foam or Brush solution onto surface and allow to penetrate. Use a brush or deck scrub to agitate soil and assist soil removal.
3. Thoroughly rinse with water.
4. Repeat if necessary.

#### **NOTE:**

- DO NOT use on marble, terrazzo, limestone or acid sensitive surfaces as it will etch these materials.
- DO NOT use on nylon or at temperatures greater than 60 degrees Celsius.
- BUILDERS KLEEN is low in pH and has a high salt level therefore is not recommended for use on aluminium.
- Always pre-test the surface to be cleaned prior to application.

#### **EXCESS GROUT & MORTAR**

1. Dilute 1 part BUILDERS KLEEN with 3 parts water.
2. Brush solution onto surface and scrub until the excess grout has been removed.
3. Thoroughly rinse with water.  
Repeat if necessary.

## BUILDERS KLEEN

### Hazard Statement

H314: Causes severe skin burns and eye damage.  
H302: Harmful if swallowed.

### Prevention

P102: Keep out of reach of children.  
P261: Avoid breathing fumes, mists, vapours or spray.  
P264: Wash contacted areas thoroughly after handling.  
P280: Wear protective gloves, protective clothing and eye or face protection.