


# **AIROMA<sup>®</sup>** IPE<sup>™</sup>



- Guaranteed for 10 years against defects in parts and workmanship.
- 10 Jahre Garantie für Schäden an Teilen und Verarbeitung.
- Garantie de 10 ans couvrant les pièces defectueuses et ca main-d'œuvre
- Garantía de 10 años contra defectos de componentes y de fabricación.
- Garanzia di 10 anni per difetti dei componenti e di produzione.
- 10 - Letnia gwarancja na czesci i jakosc wykonania.
- 10-jaarige garantie op defecten aan onderdelen en afwerking

# **AIROMA<sup>®</sup>** IPE<sup>™</sup>

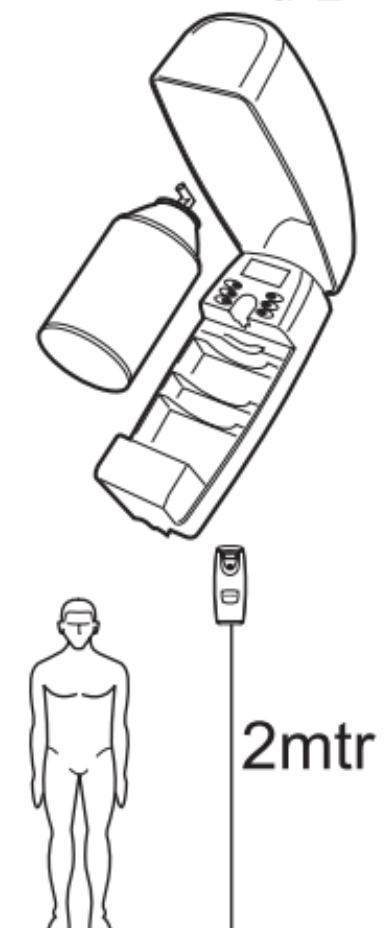

Automatic Aerosol Dispenser.  
Automatischer Aerosolspender.  
Distributeur aerosol automatique.  
Dispensador de aerosol automatico.  
Diffusore aerosol automatico.  
Automatyczny system Kontroli zapachu.  
Automatisch controlesysteem geur.

[www.vectair.co.uk](http://www.vectair.co.uk)

[www.vectair.co.uk](http://www.vectair.co.uk)

## UK INSTALLATION INSTRUCTIONS

### Programming Control Panel.



1. Insert x 2 "C" Cell alkaline batteries observing correct orientation.
2. Install a Airoma aerosol refill ensuring that it locates firmly in the unit. The AIROMA IPE dispenser is designed to operate only when a refill is in place.
3. Press power button O - Display will appear in LCD screen.
4. If factory settings are satisfactory no further action is required.
- 5a. For custom programming press PROG button and follow programming sequence using ADJUST <-> buttons to scroll through options and ENTER button to confirm options selected.
- 5b. Or go to rental options.
6. When programming is complete LCD screen will scroll through all options selected. To review selected options press and hold PROG button for 5 seconds.
7. In normal operation LCD screen displays time to next spray.
8. Do not install or use this dispenser directly above polished, painted or plastic surfaces.
9. Replacing an empty can with a new Airoma refill automatically resets the system.

### FACTORY SETTINGS

When batteries are replaced unit will revert to Factory settings.

	12 Refills per year
	24 hour operation
	7 day operation
	Zero Intensity Plus Event
	Battery / Refill icons visible
	Alarm on

## PROGRAMME OPTIONS

Press PROG button for programme options.  
 Important: Airoma refill must be in place.

	Select number of refills per year 6-12
	Select current time, 24 hr clock
	Select hours of operation per day 8-12-16-24
	Set start time, 24 hr clock
	Select days of operation 5-7
	Set current day 5 or 6 day operation only
	Select days off, 1-2 5 or 6 day operation only

### AIROMA IPE (Intensity Plus Event)

IPE provides increased fragrance up to 3 times per day to coincide with known periods of heavy use.

	Select number of Intensity Plus Events. 0-1-2-3
	Set time of up to 3 IPE's
	Select Battery/Refill icons ON/OFF
	Select Alarm function ON/OFF

When programming is complete LCD screen will scroll through all options selected. To review options, press and hold PROG button for 5 seconds.

### RENTAL OPTIONS

Rental mode can be selected to override any previous programme options. 30,45 or 60 day options can be selected by pressing RENT button at any time. Pressing RENT button will scroll through options, when correct option is displayed this remains for 4 seconds and then reverts to Next Spray countdown.